

# PRODUCT INFORMATION SHEET

Actual status: 07.08.2015




## FIRE BRIGADE MODULE FOR DC3500

VdS-approval with dc3500

CP 3500 FBM

Part-No.: 32816

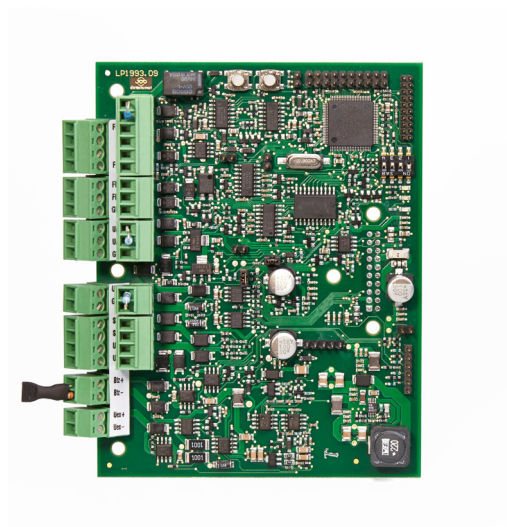

Microprocessor controlled interface for the dc3500 fire control panel to connect required devices for the direct link to the Fire Brigade.

- Interface to IFAM system 4000 to connect FAT and FBF
- Direct connection of key deposit unit
- Potential free contact to connect sabotage message to intrusion alarm panel
- Monitored output to connect signal devices
- Transmission unit-alarm with two additional criterias
- Transmission unit-fault (Opener)
- Output supply voltage 14 V DC (e.g. dialer unit)
- RS-485 interface for connection of third party systems
- System-plug to connect to dc 3500 system

### Technical Data

Ambient temperature	-5°C to +40°C
Humidity	5% to 95% (not condensing)
Dimensions (H x B x T)	125 mm x 100 mm x 20 mm
VDS-approval	with dc3500