


# INT-FI

## FIBER-OPTIC INTERFACE

- INTEGRA keypad and expansion buses to fiber-optic conversion
- support for two fiber pairs allowing modules daisy-chaining
- communication range between transmitter and receiver up to 2 km
- high immunity to interference
- full galvanic isolation
- supported also by the ACCO (RS-485)

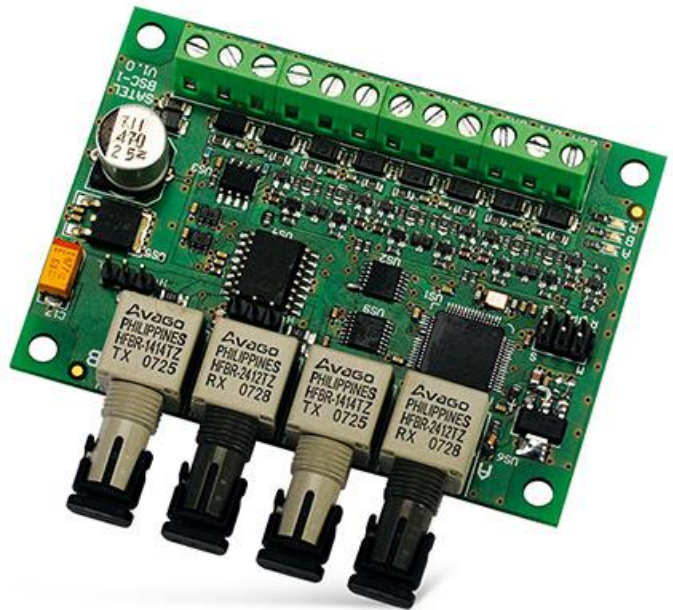

### TECHNICAL DATA

Environmental class	II
Average current consumption (standby mode) (±10%)	120 mA
Board dimensions	80 x 57 mm
Operating temperature range	-10...+55 °C
Nominal supply voltage (±15%)	12 V DC
Max. current consumption	160 mA
Weight	125 g

